


# SETUP INSTRUCTIONS

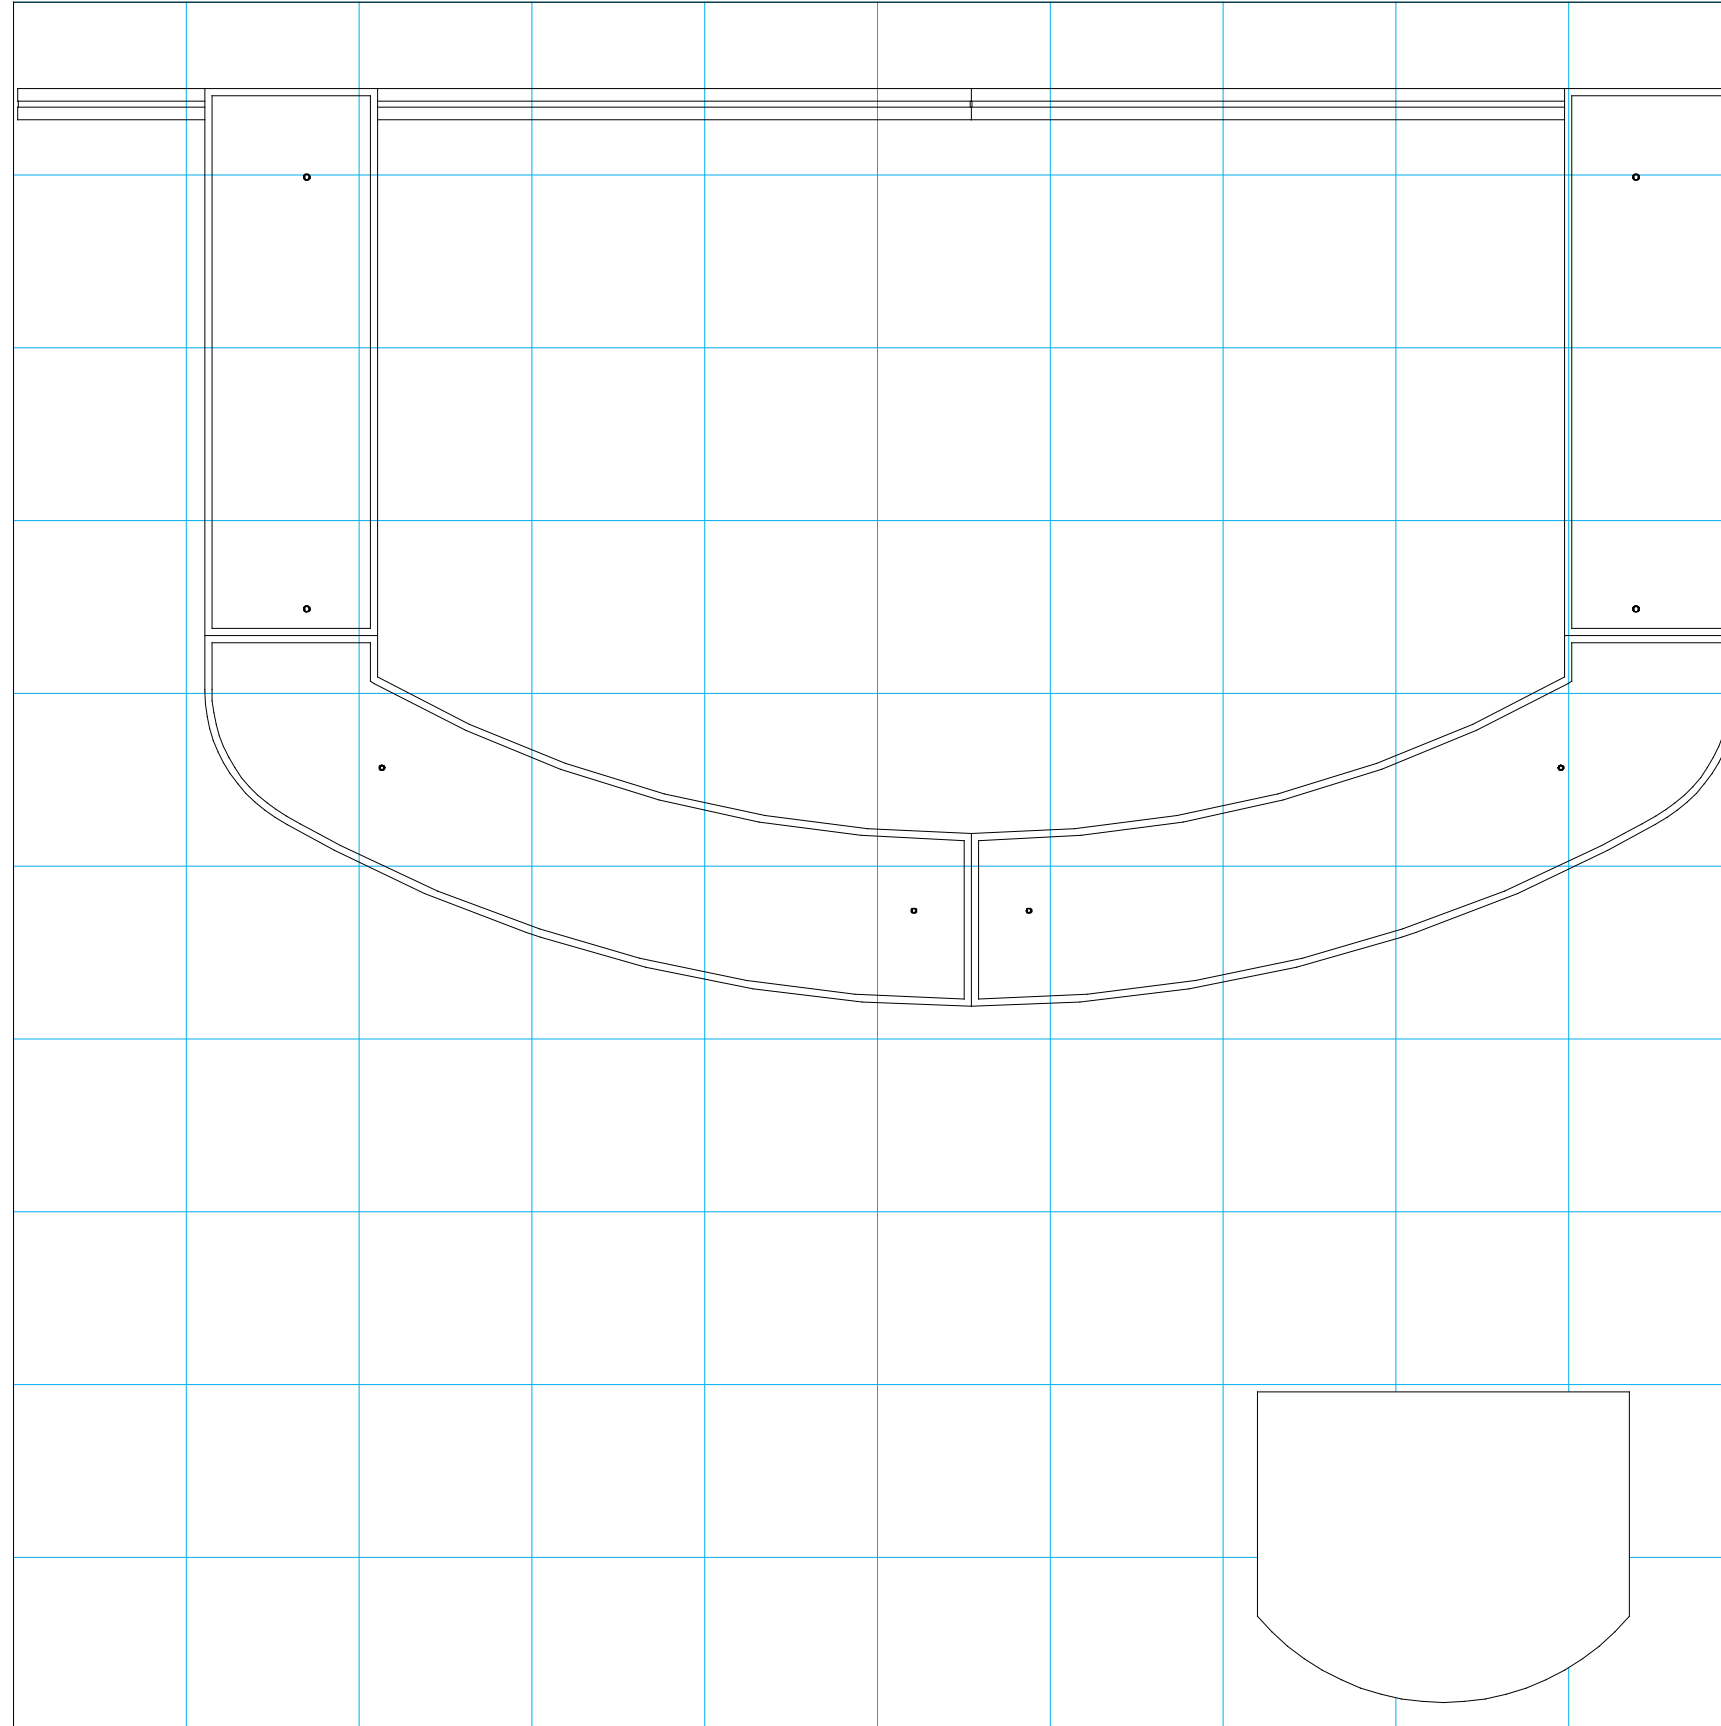

= 1 sq foot

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

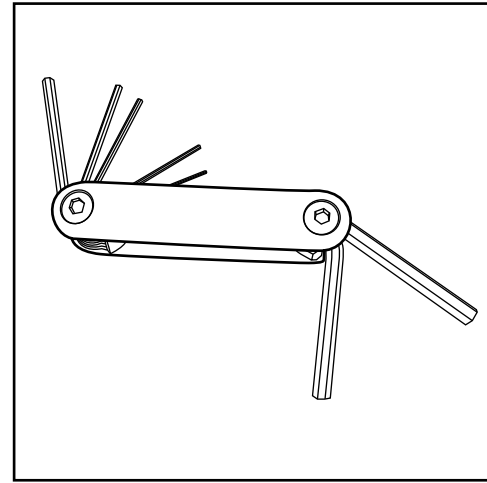


Hex Tool - Essential for Assembly

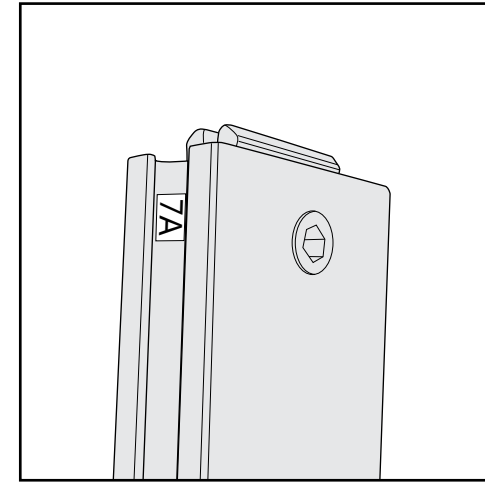


Part Identification - Numbering

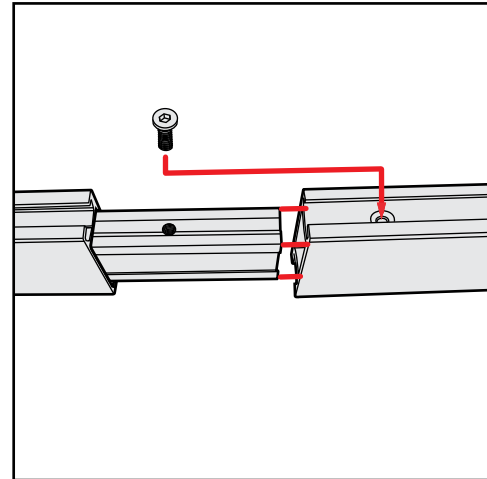


Spline Connection

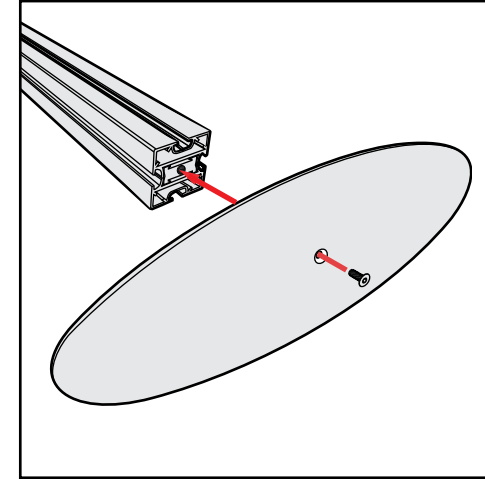

Base Plate & Extrusion Connection

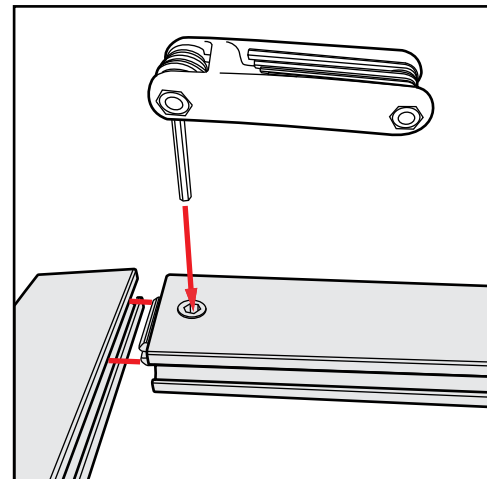

Extrusion & Lock Connection

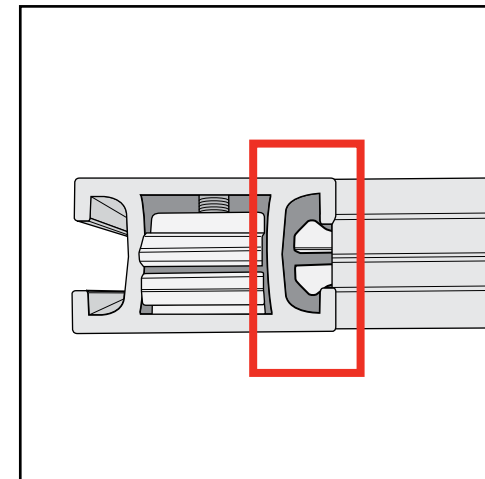


Engaged Lock



# WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS  
MAY BE REQUIRED



ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


## Side-by-Side Assembly

- 1) Frames: Place frames side-by-side with one higher than the other, then slide panel down to lock panels securely together.
- 2) Corner Connectors: Repeat Step 1 for installing corner connectors to frames.

## Side-by-Side Disassembly


- 1) Pull pin lock outwards to disengage.
- 2) Pull frames upward and apart at the same time to detach.

Assembly

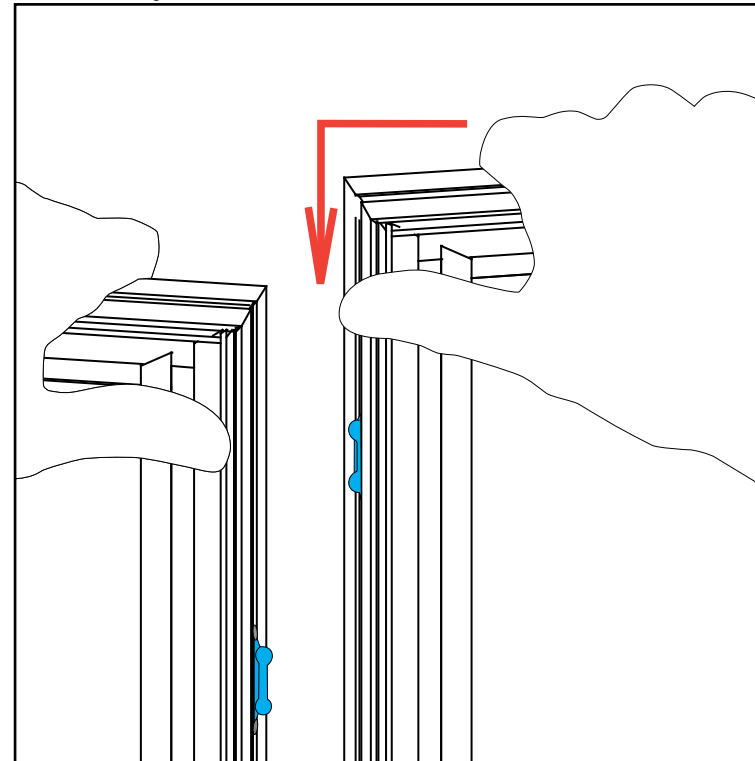


Assembly Cont'd

Push pin lock into hole of connecting frame.  
Note: Block of pin lock will secure in groove.

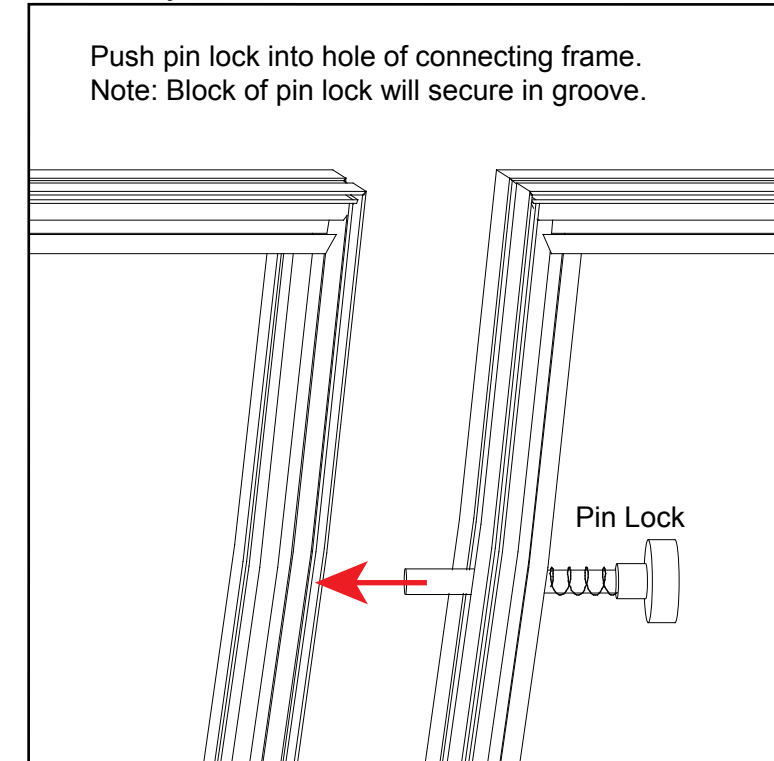

Corner Connector



Top View

Note: Orientation of Corner Connector may change.

## Stacking Assembly


- 1) Place one horizontal frame on top of the other, lining up the center grooves.
- 2) Turn stacking lock clockwise to tighten into place. Repeat for each lock.

## Stacking Disassembly

- 1) Turn the stacking lock counter-clockwise to loosen.
- 2) The whole spring on the stacking lock should be in view to release each frame. The disengaged spring should release the stacking lock. If not, keep turning the stacking lock until it disengages.


Stacking

Push stacking lock into the slot of the upper frame, then spin the cap to tighten the lock.

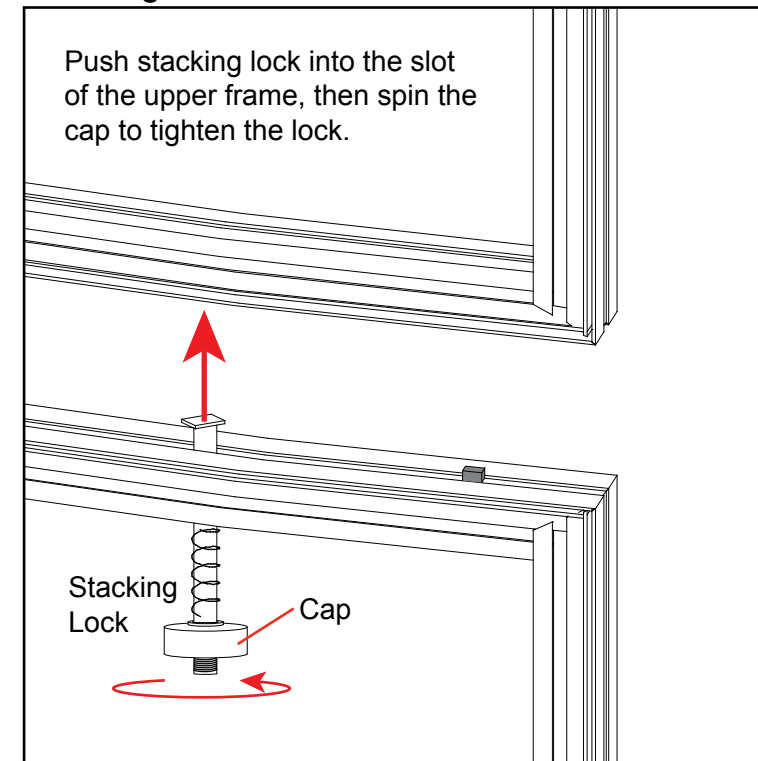

Unstacking


Disengage the stacking lock by spinning the cap counter clockwise and pulling down.

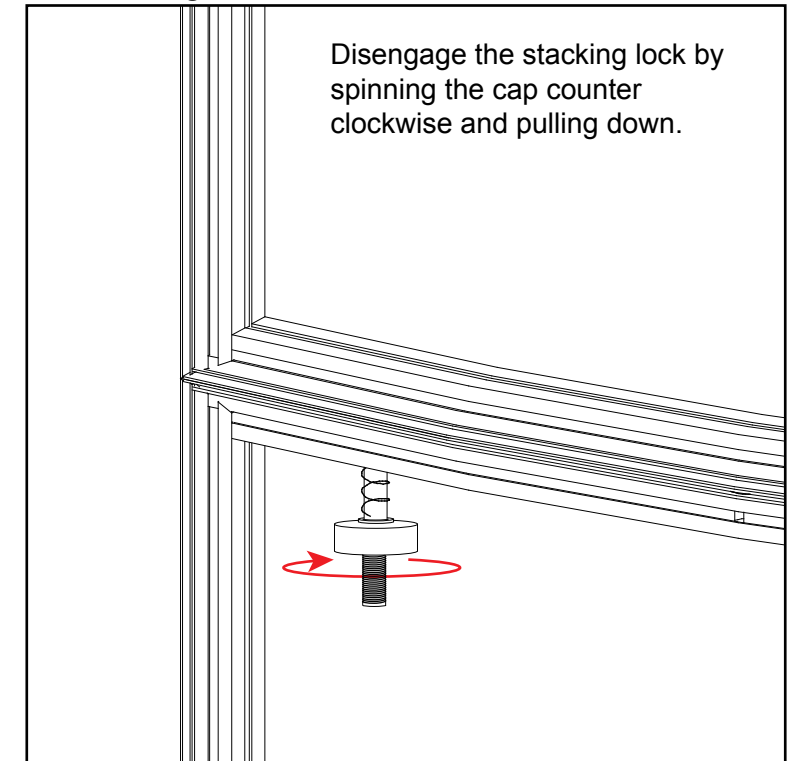


# SEG Graphic Installation *in 3 Steps*

*The Perfect Fit*


## STEP 1: Attach Corners

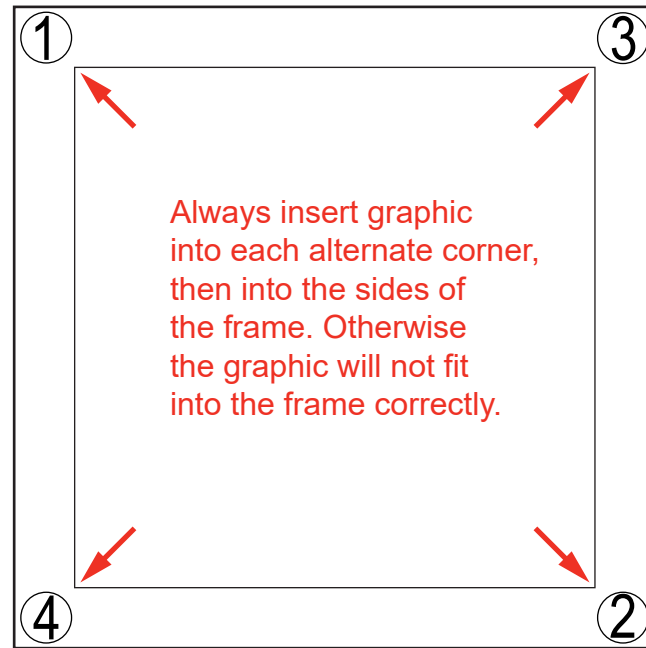

## STEP 2: Attach Middle

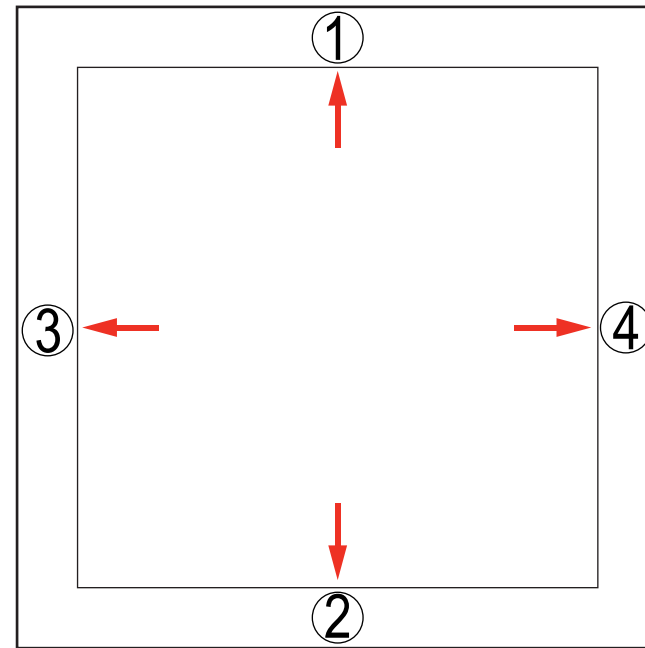

## STEP 3: Attach Sides

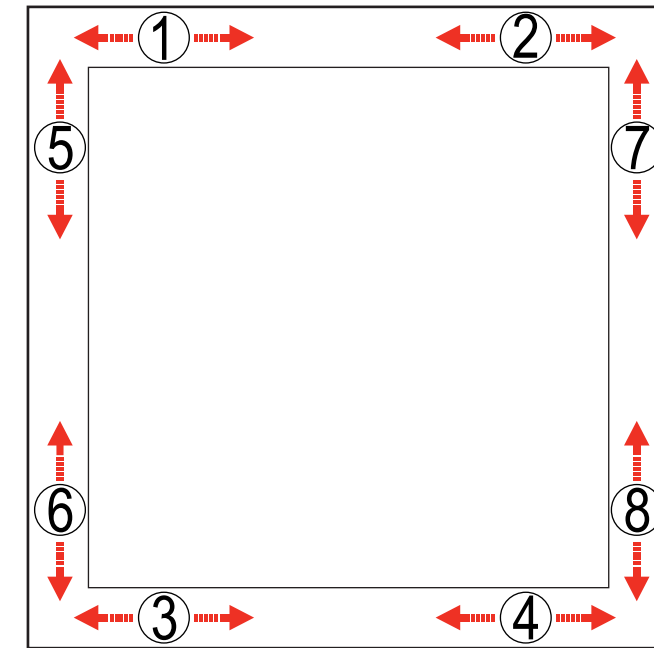

Insert narrow side of silicone welt into the channel at corner 1, with fabric to the outside.

Repeat for opposite corner 2, then corner 3, then corner 4.

Once corners are attached, press the middle of edge 1 into the channel. Then press middle of edge 2 into the channel on opposite side.

Repeat with edge 3 & 4.

Once the middle of sides are attached, fully press the silicone welt into the channel, between center and corner at location 1. Repeat the process between center and corner at location 2.

Do the same for welt on opposite side, at locations 3 & 4. Then repeat for locations 5 & 6 and 7 & 8.

Once the welt is fully inserted on all sides, smooth out edges as needed for a perfect fit.



To remove the graphic from the frame, locate the fabric **pull tab**. Gently pull on the tab to remove the graphic.

Install video:




CRATE PACKING




Item	Qty.	Description
1	1	19" w x 95" h Gravitee Panel
2	1	95" h Gravitee Corner Post
3	1	38" w x 95" h Gravitee Door Panel
4	1	94.5" h Gravitee Corner Post & Hinged Connector w/ caps
5	1	46" w x 95" h Gravitee curved Panel
6	1	46" w x 95" h Gravitee curved Panel
7	1	94.5" h Gravitee Corner Post & Hinged Connector w/ caps
8	1	38" w x 95" h Gravitee Panel
9	1	95" h Gravitee Corner Post
10	1	45.106" w x 95" h Gravitee Panel
11	1	45.106" w x 95" h Gravitee Panel

Steps:


- 1) Assemble Gravitee panels & connectors together in numerical order.  
*Refer to the Gravitee Assembly general information page.*
- 2) Apply SEG graphics to assembly as shown.  
*Refer to the SEG Installation general information page.*

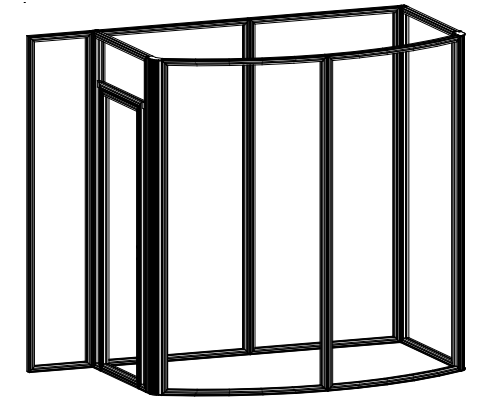

When assembled

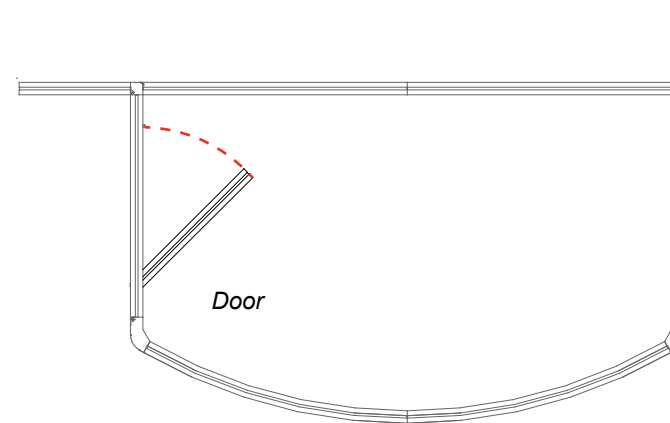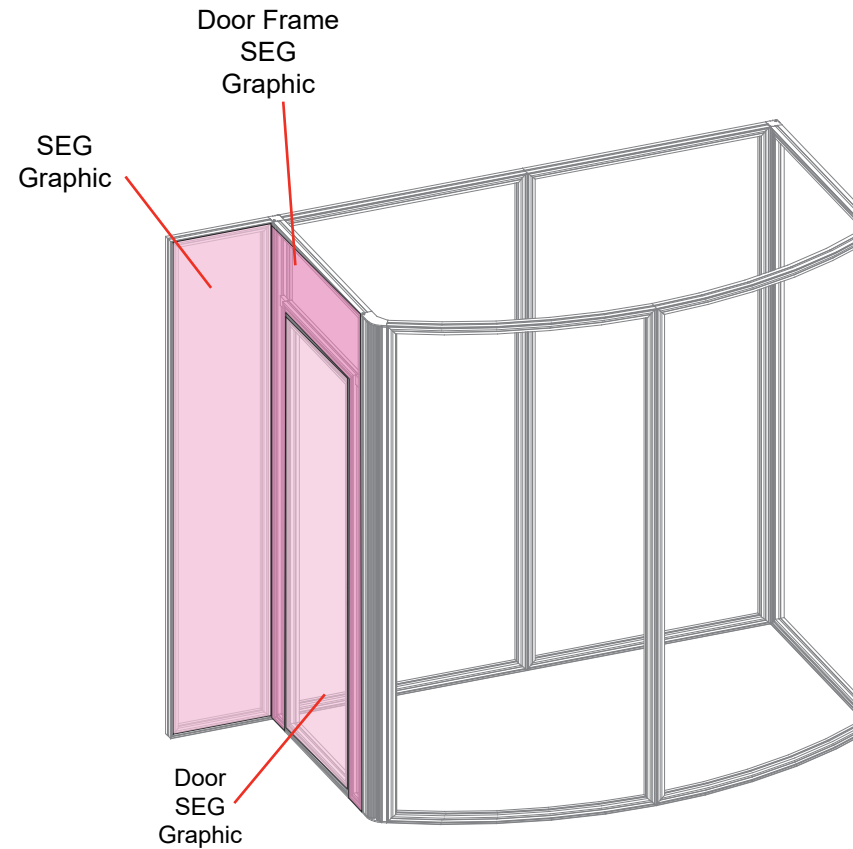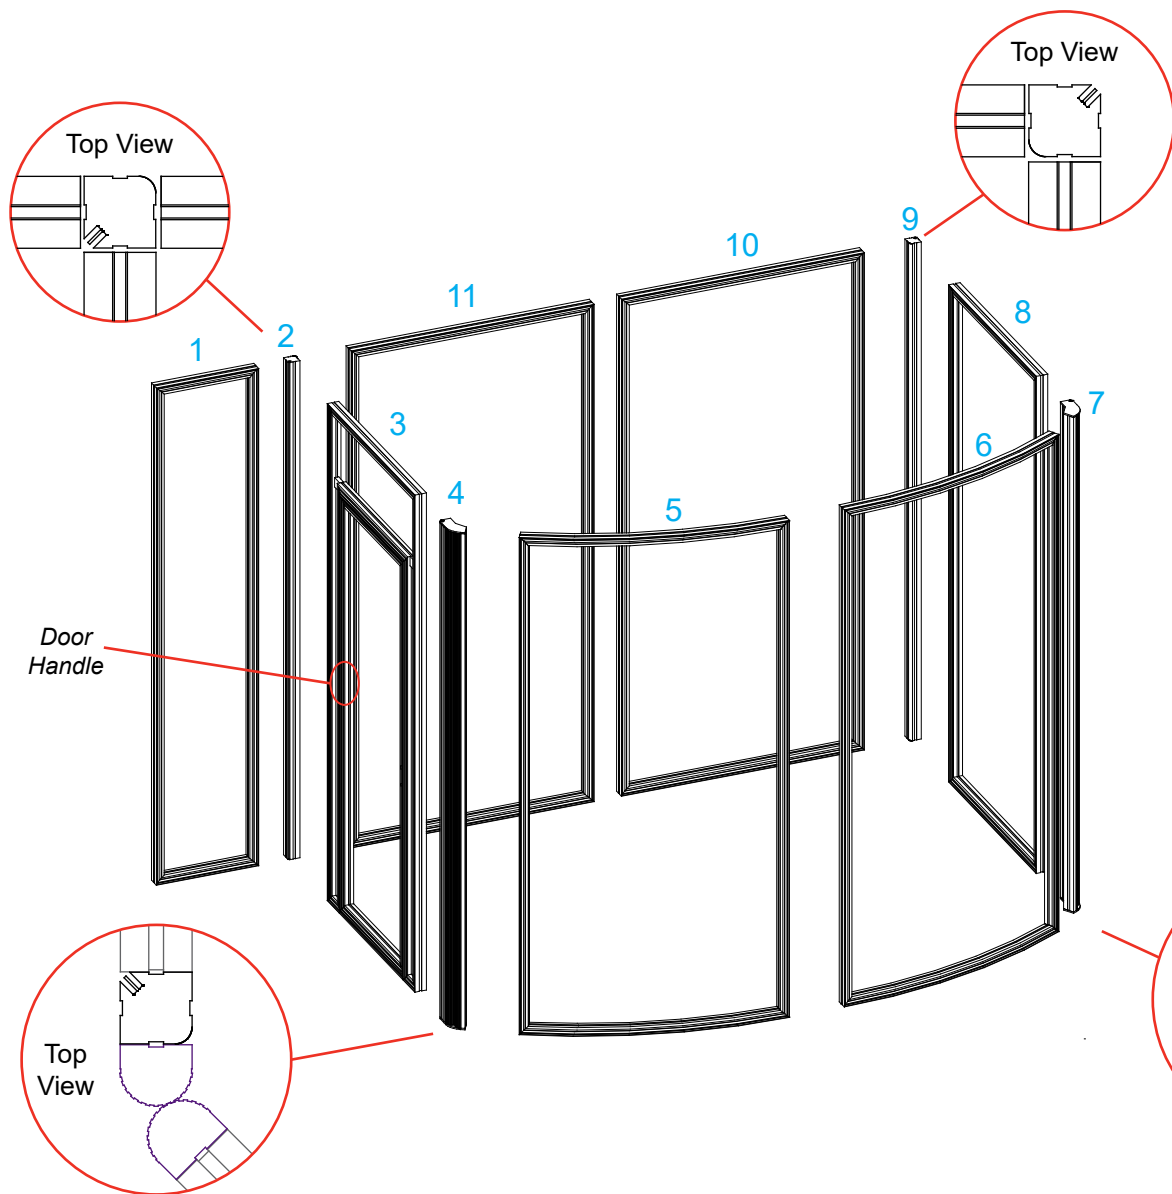


TOP VIEW

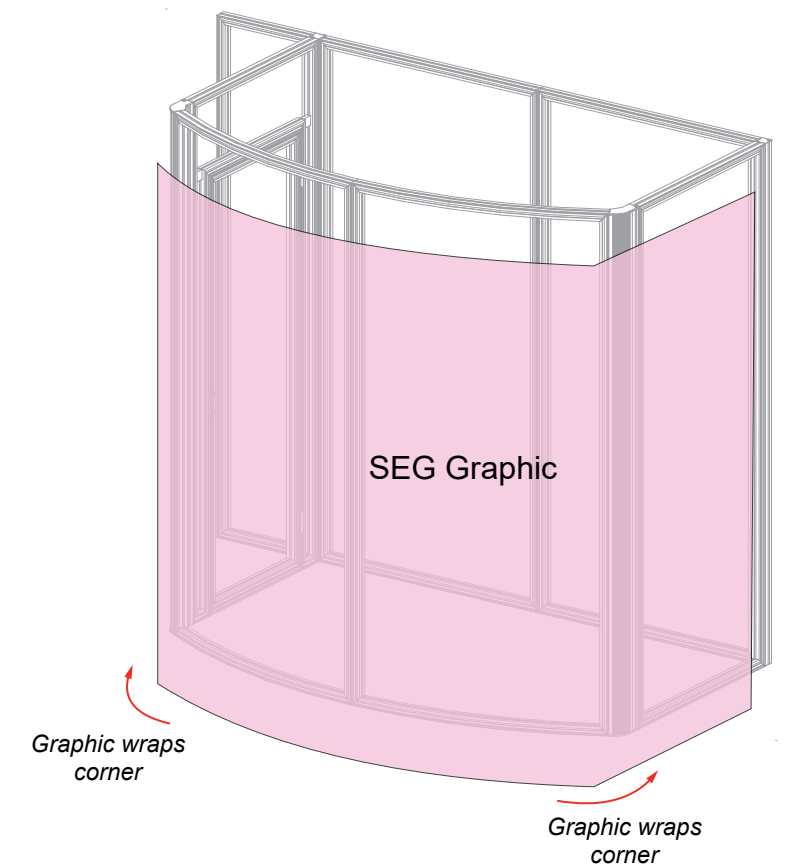

Item	Qty.	Description
A	1	12'x38" Canopy Panel
B	1	53.24" x 25.717" Canopy Panel
C	1	53.24" x 25.717" Canopy Panel
D	1	12'x38" Canopy panel

- Steps:
- 1) Install Canopy Panels [A,B,C,D] to top of Gravitee panels as shown. See [Canopy Attachment](#) detail.
  - 2) Attach Monitor Mount to front panels. See [Monitor Mount Attachment](#) detail.
  - 3) Connect power cords to puck lights in ceiling panels. See [Puck Light Connection](#) detail.

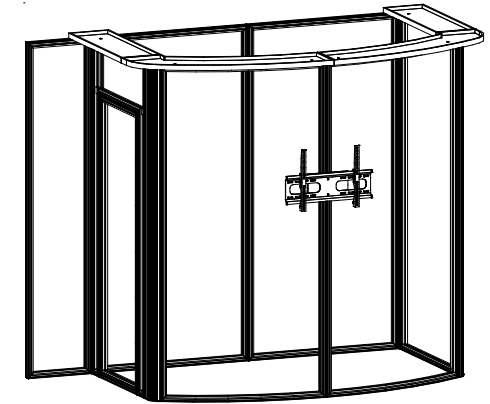


When assembled

**\* Canopy Attachment**

Slide V4 connector into groove of horizontal extrusion; tighten set screw to secure V4 connector in place at correct location. Insert screw through hole in canopy into threaded hole of V4 connector; tighten screw to secure.

Connect ceiling pieces together using bolts washer and wing nuts

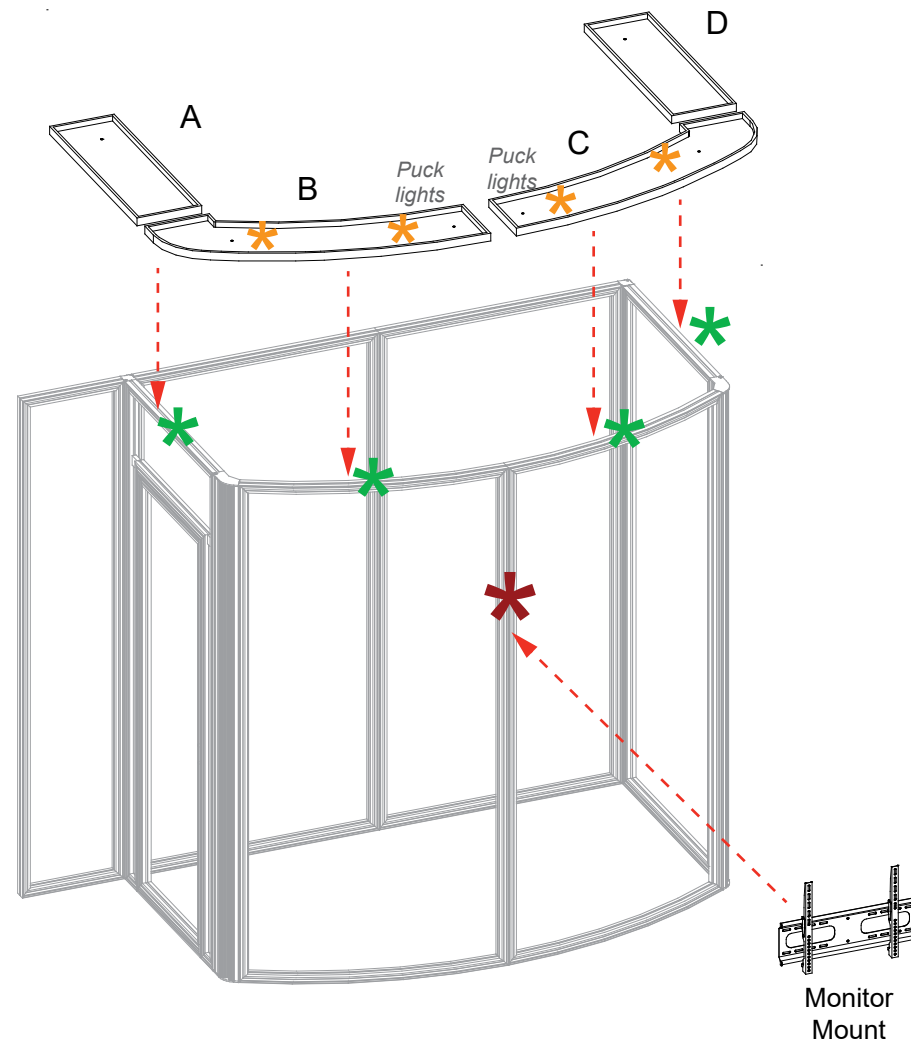

**\* Puck Light Connection**

Connect transformer to puck lights, then attach transformer to power source.

**\* Monitor Mount Attachment**

Slide V4 connectors into vertical channels of Gravitee frames. Tighten set screws to secure.


Attach Standoff Barrels to V4 connectors; and connect Mounting Plate to standoff barrels, using bolts. Attach Monitor Mount to Mounting Plate.

*Standoff barrels install through the SEG Graphic.*

Item	Qty.	Description
1	1	38" GS220 Vertical Extrusion w/ Door Hinges
2	1	38" GS220 Vertical Extrusion w/ Door Stop
3	1	38" GS210 Vertical Extrusion
3A	1	34.417" Z33 Vertical Extrusion
4	1	38" GS210 Vertical Extrusion
4A	1	34.417" Z33 Vertical Extrusion
5	2	22.0197" Z45 Horizontal Extrusion
6,6A	2,2	12.5" Z45 Horizontal Extrusion
7	2	25.639" Z45 Curved Extrusion

Steps

- 1) Attach horizontal extrusions [5] and [7] between assemblies [1,4,6,6A] and [2,3,6,6A], making sure Velcro is facing inward.
- 2) Connect vertical extrusions [3A] and [4A] on top of horizontal extrusion [7].
- 3) Slide infill between verticals [3A] and [4A].
- 4) Attach assembled door to vertical extrusion [1]. See **Door Connection** detail.
- 5) Attach upper horizontal extrusions [5] and [7] between assemblies and on top of infill and door.
- 6) Connect shelf supports to Velcro, then set shelf on top of supports.
- 7) Attach pedestal top to extrusions [6A]. See **Pedestal Top Attachment** detail.

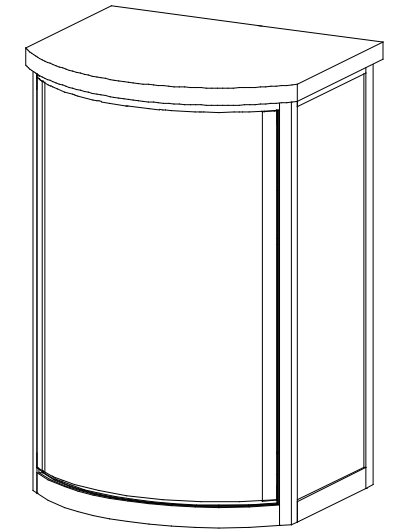

Completed Pedestal Assembly

